


BYZ09-15-04D

DC solenoids for hydraulics valves


- Applicable to 3-way hydraulic solenoid directional valve
- With threaded connection, the coil can be replaced without shutdown
- Equipped with manual emergency device
- Coil inner hole $\phi 13$

DC 12V
DC 24V

Other can be customized



Outline and connection dimensions

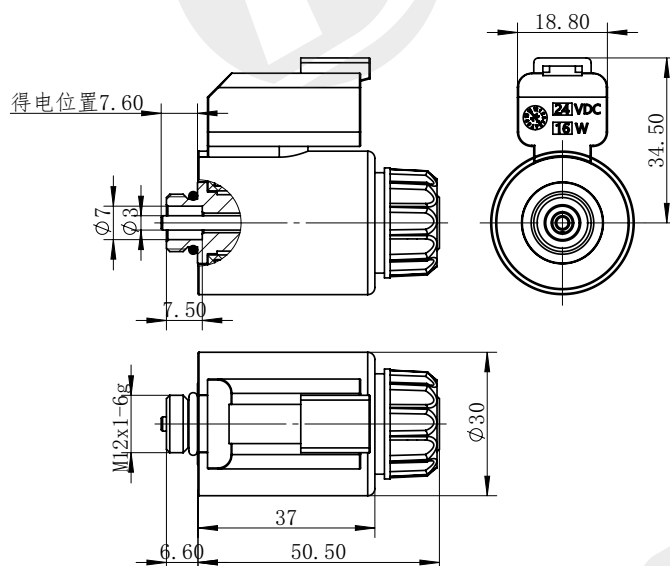

technical parameter

Ambient temperature	°C	-25~50
Voltage fluctuation range	%	85~110
Rated power	W	16
Rated stroke	mm	1.8
Full stroke	mm	≥ 2.3
Working oil pressure	Mpa	≤ 16
Degree of protection		IP67
Operating frequency	T/h	12000
Power on duration	%	100
Insulation class		H(180)
Electrical connection mode		DT04-2P

matters needing attention

1. The coil shall not be powered on alone, which has the risk of burning!
2. Non explosion-proof coil shall not be used in medium with explosion risk!
3. After the coil is installed, it must be grounded reliably, otherwise there is a risk of electric shock !

F-S characteristic curve

