



Electromagnet for proportional valve

- Applicable to electro-hydraulic proportional threaded cartridge valves
- Threaded connection, coil can be replaced without stopping
- Coil inner hole $\phi 23$. All-plastic sealing process

Outline and connection dimensions

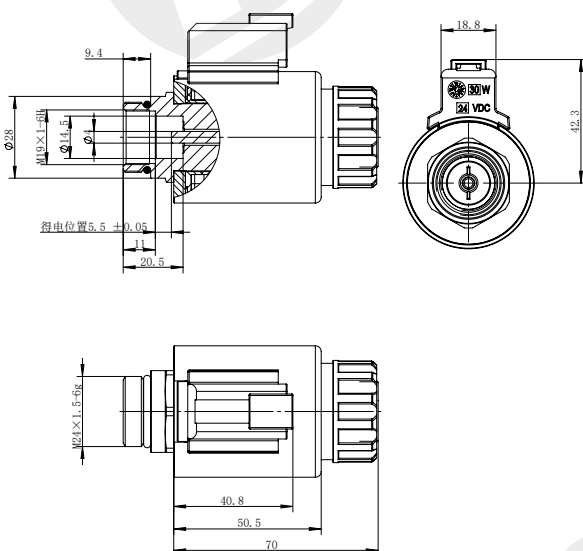


F-S characteristic curve

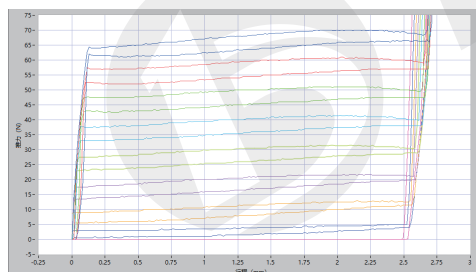

样本数据来源于试验室环境，仅供参考，贵公司如需最新数据或有特殊需求，欢迎联系博业液压工程师。
The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.

其它规格可定做
Other can be customized



技术参数 /technical parameter			
环境温度 Ambient temperature	℃	-25~50	
额定电压 Rated voltage	VDC	12	24
额定电流 Rated current	A	1.4	0.7
最大电流 Maximum current	A	1.5	0.8
额定电阻 Rated resistance	Ω	5.6	22.5
额定行程 Rated stroke	mm	2.8	
全行程 Full stroke	mm	2.8	
额定推力 Rated thrust	N	50	
力滞环 Force hysteresis	%	≤ 4	
电流滞环 Current hysteresis	%	≤ 4	
重复精度 Repetition accuracy	%	≤ 1	
工作油压 Working oil pressure	MPa	≤ 21	
防护等级 Degree of protection		IP67	
通电持续率 Power on duration	%	100	
绝缘等级 Insulation class		H (180)	
电气连接方式 Electrical connection mode		DT04-2P	

matters needing attention

1. 首次使用或长期停机后启用，请先将系统内空气排净！
 2. 可任意方向安装，建议水平安装。
1. After the first use or long-term shutdown, please exhaust the air in the system first!
2. It can be installed in any direction, and it is recommended to install horizontally.