

BYG10-16-04

比例阀用电磁铁


Electromagnet for proportional valve

- 适用于 SP10-57D 系列双向电液比例螺纹插装阀
- 螺纹连接，线圈可实现免停机更换
- 线圈内孔 $\phi 16$ ，全塑封工艺

- Suitable for sp10-57d series Bidirectional electro-hydraulic proportional threaded cartridge valve
- Threaded connection, coil can be replaced without stopping
- Coil inner hole $\phi 16$. All-plastic sealing process


外形及连接尺寸

Outline and connection dimensions

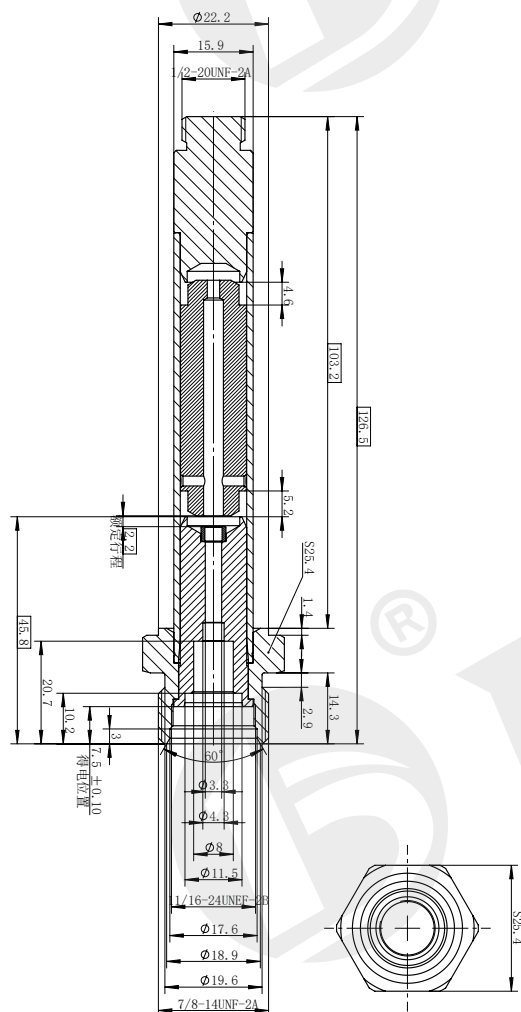

DC12V 20W
DC24V 20W

其它规格可定做
Other can be customized

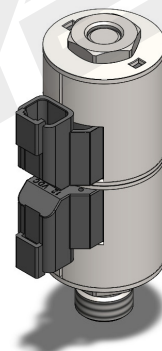

技术参数 /technical parameter

环境温度 Ambient temperature	°C	-25~50	
额定电压 Rated voltage	VDC	12	24
额定功率 Rated power	W	20	
额定电阻 Rated resistance	Ω	7.10	28.30
额定行程 Rated stroke	mm	2.2	
额定推力 Rated thrust	N	20	
力滞环 Force hysteresis	%	≤ 4	
电流滞环 Current hysteresis	%	≤ 4	
重复精度 Repetition accuracy	%	≤ 1	
工作油压 Working oil pressure	MPa	≤ 25	
防护等级 Degree of protection		IP67	
通电持续率 Power on duration	%	100	
绝缘等级 Insulation class		H (180)	
电气连接方式 Electrical connection mode		DT04-2P	

样本数据来源于试验室环境，仅供参考，贵公司如需最新数据或有特殊需求，欢迎联系博业液压工程师。
The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.