

BYM01-18-03W-03



Solenoid for threaded cartridge valve

- Applicable to 4-way threaded cartridge valve with position feedback
- Threaded connection, coil can be replaced without stopping
- Equipped with manual adjustment device
- Coil inner hole $\phi 18$. All-plastic sealing process

DC 12V
DC 24V

Other can be customized


Outline and connection dimensions

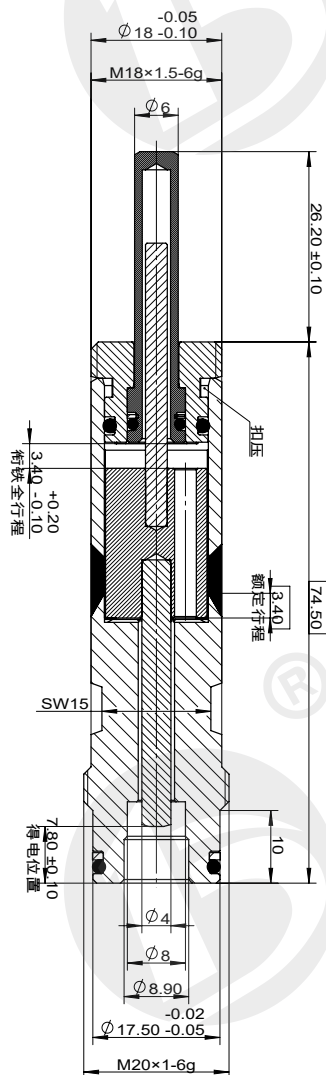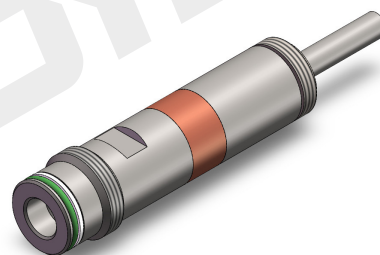

technical parameter

technical parameter		
Ambient temperature	℃	-25~50
Voltage fluctuation range	%	85~110
Rated power	W	20
Rated stroke	mm	3.4
Full stroke	mm	3.4
Working oil pressure	Mpa	≤ 21
Degree of protection		IP65
Operating frequency	T/h	12000
Power on duration	%	100
Insulation class		H(180)
Electrical connection mode		DIN43650/ DT04-2P

F-S characteristic curve

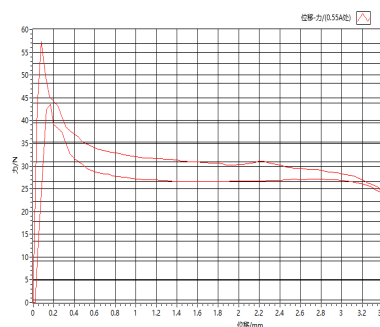

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.