

BYM01-18-03W-03


螺纹插装阀用电磁铁

Solenoid for threaded cartridge valve

- 适用于 4 通径带位置反馈螺纹插装换向阀
- 螺纹连接，线圈可实现免停机更换
- 配备手动调整装置
- 线圈内孔 $\phi 18$ ，全塑封工艺
- Applicable to 4-way threaded cartridge valve with position feedback
- Threaded connection, coil can be replaced without stopping
- Equipped with manual adjustment device
- Coil inner hole $\phi 18$. All-plastic sealing process


外形及连接尺寸

Outline and connection dimensions

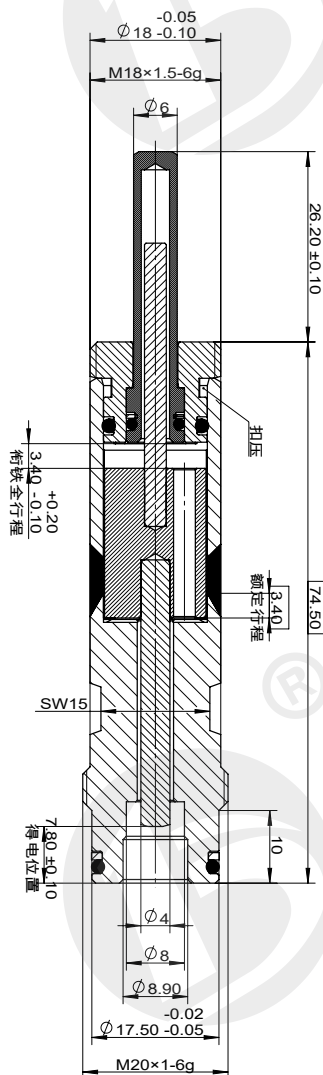

DC 12V
DC 24V

其它规格可定做
Other can be customized

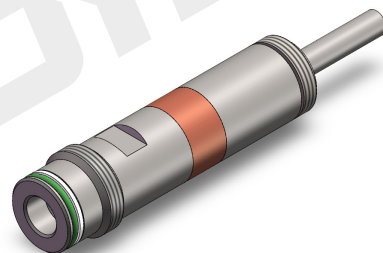


技术参数 /technical parameter

环境温度 Ambient temperature	°C	-25~50
电压波动范围 Voltage fluctuation range	%	85~110
额定功率 Rated power	W	20
额定行程 Rated stroke	mm	3.4
全行程 Full stroke	mm	3.4
工作油压 Working oil pressure	Mpa	≤ 21
防护等级 Degree of protection		IP65
操作频率 Operating frequency	T/h	12000
通电持续率 Power on duration	%	100
绝缘等级 Insulation class		H(180)
电气连接方式 Electrical connection mode		DIN43650/ DT04-2P

力 - 位移特性曲线

F-S characteristic curve

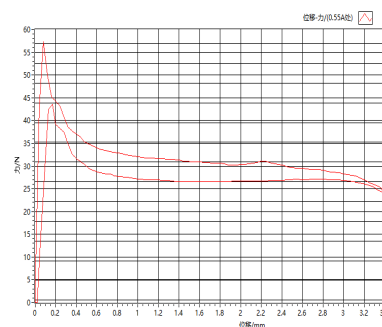

样本数据来源于试验室环境，仅供参考，贵公司如需最新数据或有特殊需求，欢迎联系博业液压工程师。
The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.