




插装阀用线圈

Coil for cartridge valve

BYC02-13-04D

可定制比例型  
Customizable proportions



DC 12V  
DC 24V




其它规格可定做  
Other can be customized

技术参数 /technical parameter

|                                  |   |        |                           |   |         |
|----------------------------------|---|--------|---------------------------|---|---------|
| 环境温度 Ambienttemperature          | ℃ | -25~50 | 防护等级 Degree of protection |   | IP67    |
| 电压波动范围 Voltage fluctuation range | % | 85~110 | 通电持续率 Power on duration   | % | 100     |
| 额定功率 Rated power                 | W | 15/20  | 绝缘等级 Insulation class     |   | H (180) |

BYC02-13-04G

可定制比例型  
Customizable proportions

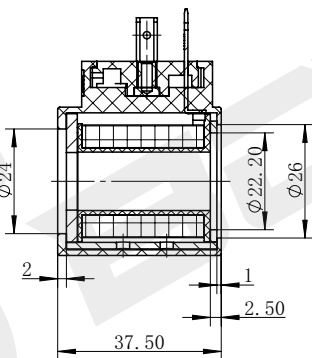

DC 24V  
AC 220V

其它规格可定做  
Other can be customized

技术参数 /technical parameter

|                                  |   |        |                           |   |         |
|----------------------------------|---|--------|---------------------------|---|---------|
| 环境温度 Ambienttemperature          | ℃ | -25~50 | 防护等级 Degree of protection |   | IP65    |
| 电压波动范围 Voltage fluctuation range | % | 85~110 | 通电持续率 Power on duration   | % | 100     |
| 额定功率 Rated power                 | W | 15/20  | 绝缘等级 Insulation class     |   | H (180) |

样本数据来源于试验室环境，仅供参考，贵公司如需最新数据或有特殊需求，欢迎联系博业液压工程师。  
The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.