
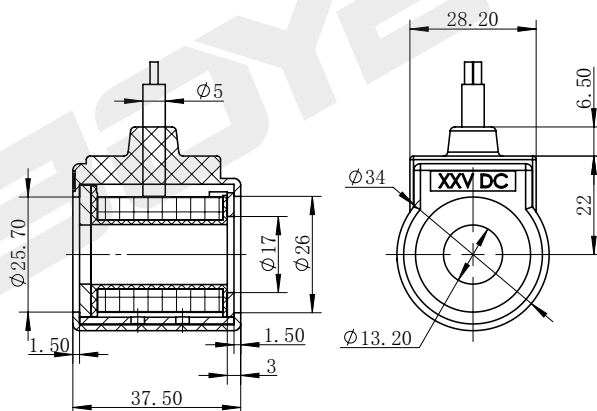


Coil for cartridge valve

BYC02-13-05H

DC 24V
AC 220V

Other can be customized



technical parameter



Ambient temperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)

BYC02-13-06M

Customizable proportions

DC 12V
DC 24V

Other can be customized

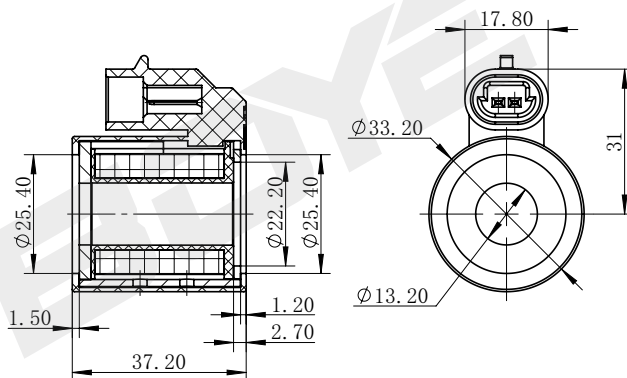

technical parameter

Ambient temperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.