




Coil for cartridge valve

BYC02-13-07L

Customizable proportions

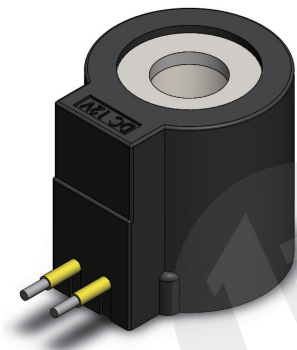

DC 24V
AC 220V

Other can be customized

technical parameter




Ambienttemperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)

DC 24V
AC 220V

Other can be customized

BYC02-13-07L1

Customizable proportions

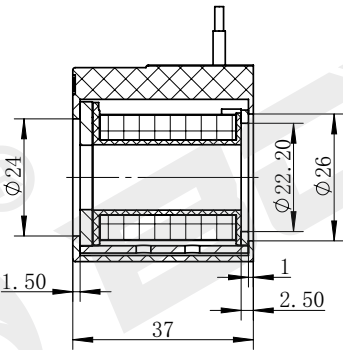

technical parameter

Ambienttemperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)