

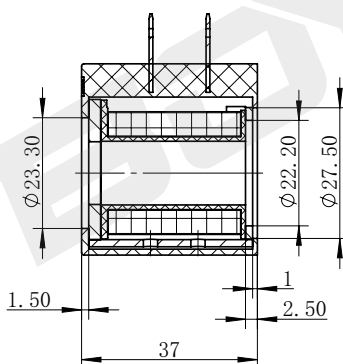


Coil for cartridge valve

BYC02-13-07S

Customizable proportions






DC 24V
AC 220V

Other can be customized

technical parameter

Ambient temperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)

BYC02-13A-01G



DC 24V
AC 220V

Other can be customized

technical parameter

Ambient temperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.