
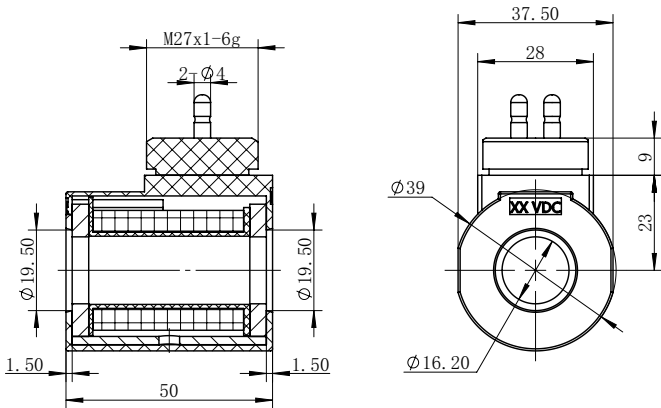


Coil for cartridge valve

BYC03-16-02K27


DC 12V
DC 24V
Other can be customized

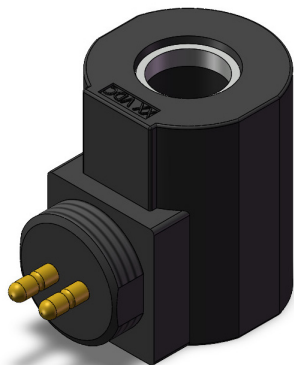

technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	21/25	Insulation class		H (180)

BYC03-16-03G

DC 24V
AC 220V
Other can be customized

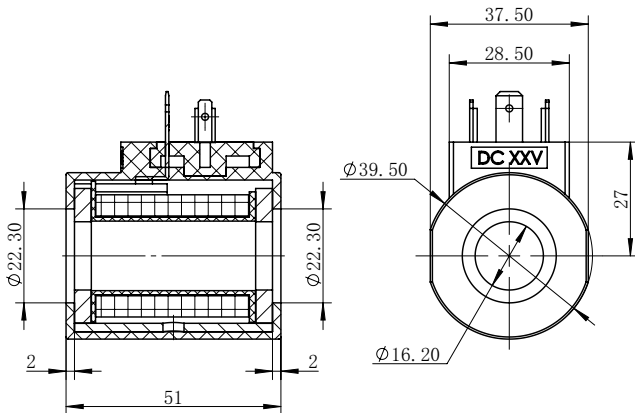

technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	26	Insulation class		H (180)

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.