


Coil for cartridge valve

BYC04-13-04G

DC 24V
AC 220V

Other can be customized

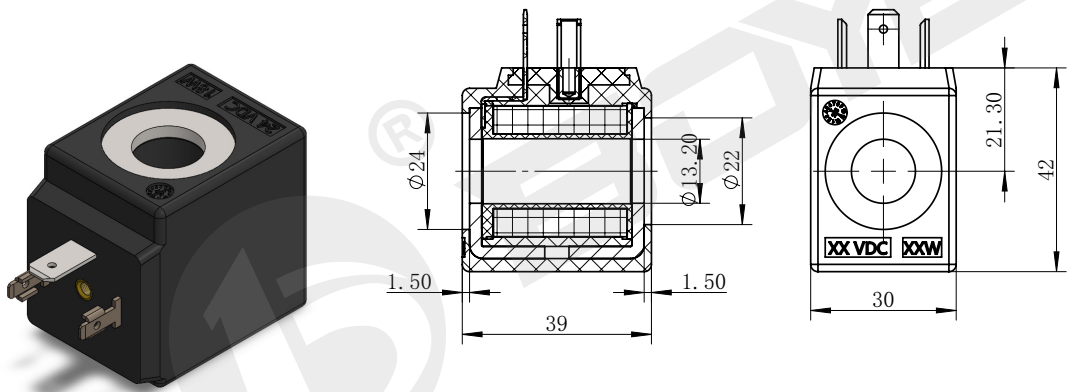


technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	18	Insulation class		H (180)

DC 24V
AC 220V

Other can be customized

BYC04-13-05S

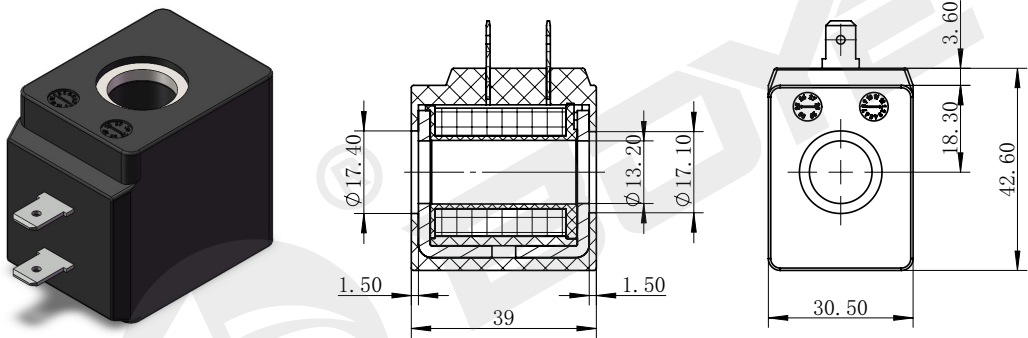

technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	18	Insulation class		H (180)