
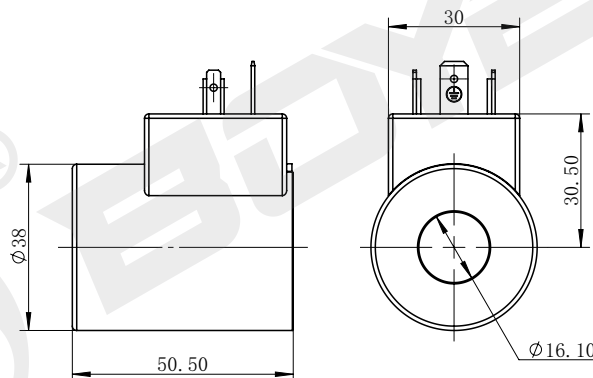


Coil for cartridge valve

BYC06-16-01G**DC 24V**
AC 220V

Other can be customized





technical parameter

Ambient temperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	25	Insulation class		H (180)

DC 24V
AC 220V

Other can be customized

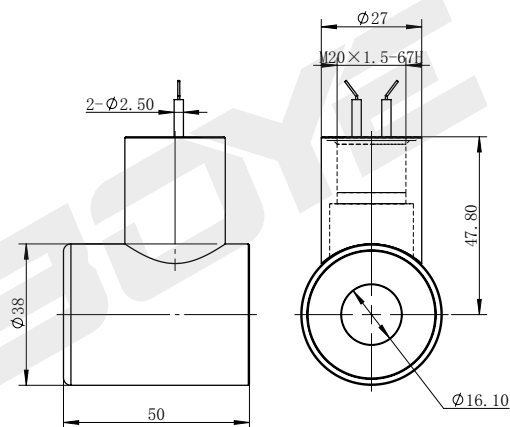BYC06-16A-01L

technical parameter

Ambient temperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	22	Insulation class		H (180)