


Coil for cartridge valve

BYC06-19-01J

Customizable proportions

DC 12V**DC 24V**

Other can be customized

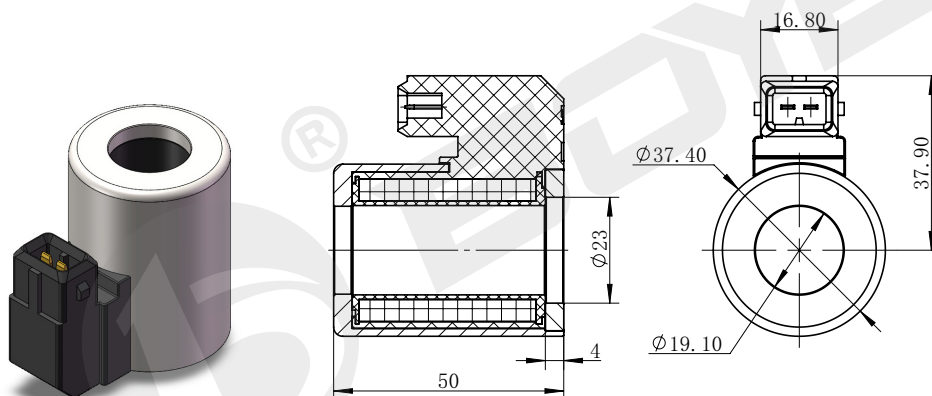

technical parameter


Ambient temperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	22/36	Insulation class		H (180)

DC 12V**DC 24V**

Other can be customized

BYC06-19-02D

Customizable proportions

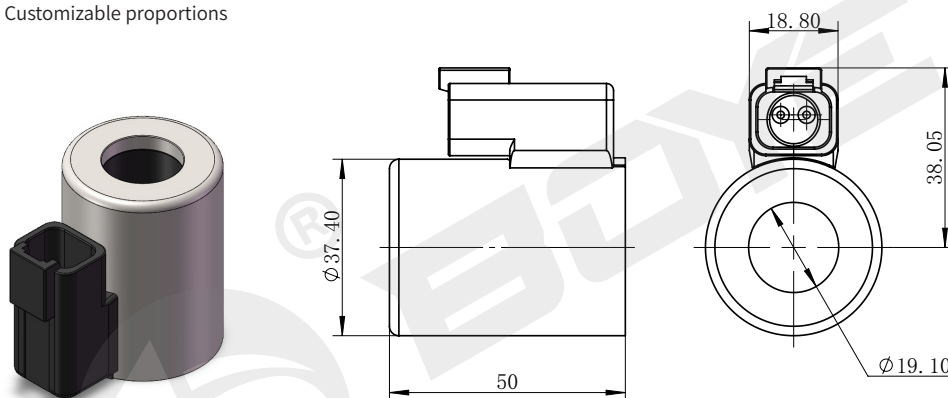

technical parameter

Ambient temperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	22/36	Insulation class		H (180)