


Coil for cartridge valve

DC 12V
DC 24V

Other can be customized

BYC06-19B-02D

Customizable proportions

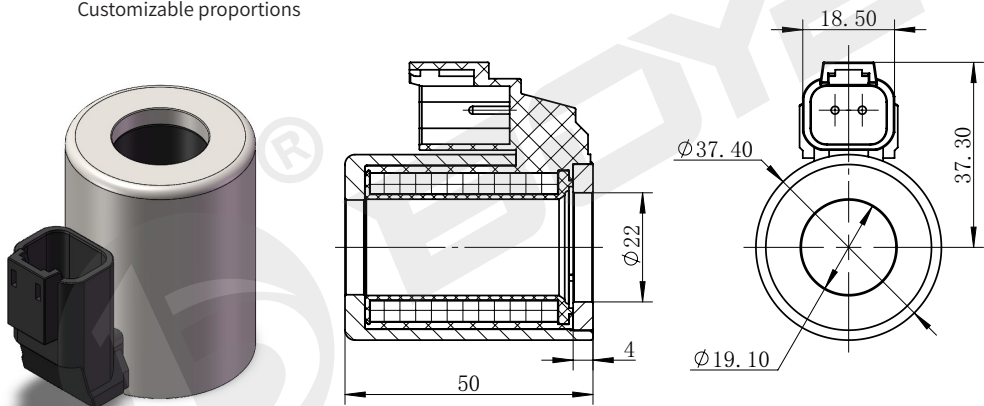


technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	26	Insulation class		H (180)

DC 12V
DC 24V

Other can be customized

BYC06-19B-02J

Customizable proportions

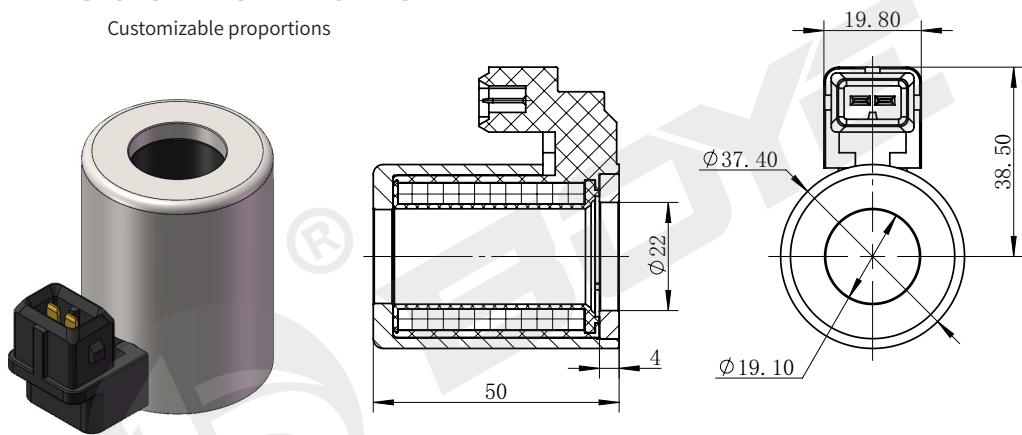

technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	26	Insulation class		H (180)

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.