
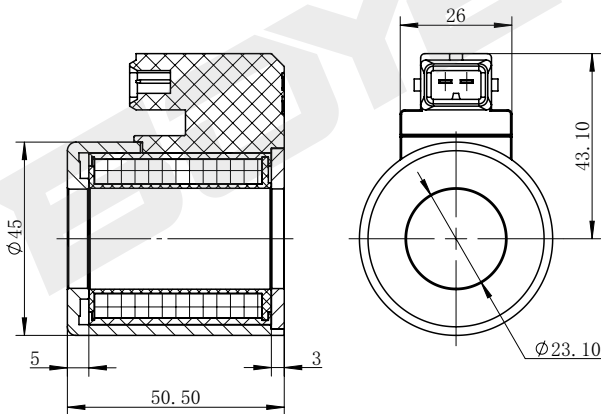


DC coil for valves

# BYZ09-50F-01J

DC 12V  
DC 24V

Other can be customized





technical parameter					
Ambienttemperature	℃	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	30	nsulation class		H (180)

DC 12V  
DC 24V

Other can be customized

# BYZ09-50G-01D

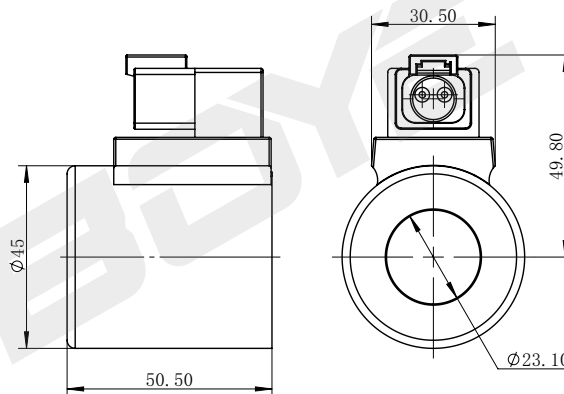

technical parameter					
Ambienttemperature	℃	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	30	Insulation class		H (180)

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.