


BYS10-73-01G

Electromagnet for metering pump


- Suitable for high-speed switching valves of electromagnetic diaphragm metering pumps
- Comes with return spring
- Comes with manual emergency device
- Coil full plastic sealing process

AC 110V
AC 220V

Other can be customized



Outline and connection dimensions

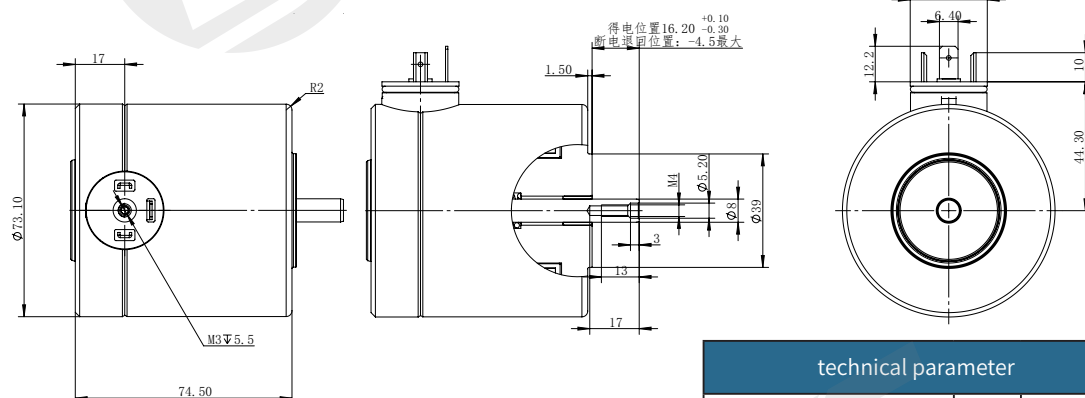

matters needing attention

1. The coil shall not be powered on alone, which has the risk of burning!
2. Non explosion-proof coil shall not be used in medium with explosion risk!
3. After the coil is installed, it must be grounded reliably, otherwise there is a risk of electric shock !

technical parameter		
Ambient temperature	°C	0~40
Voltage fluctuation range	%	85~110
Rated power	W	24
Rated stroke	mm	4.5
Full stroke	mm	—
Working oil pressure	Mpa	—
Degree of protection		IP65
Operating frequency	T/h	21600
Power on duration	%	13.3
Insulation class		H(180)
Electrical connection mode		DIN43650