

**BY512-35-01LD**


## 多路阀用电磁铁

## Electromagnet for multi-way valve

- 适用于电磁多路阀
- 自带复位弹簧
- 线圈全塑封工艺
- Suitable for electromagnetic multi-way valves
- Comes with return spring
- Coil full plastic sealing process

## 外形及连接尺寸


## Outline and connection dimensions

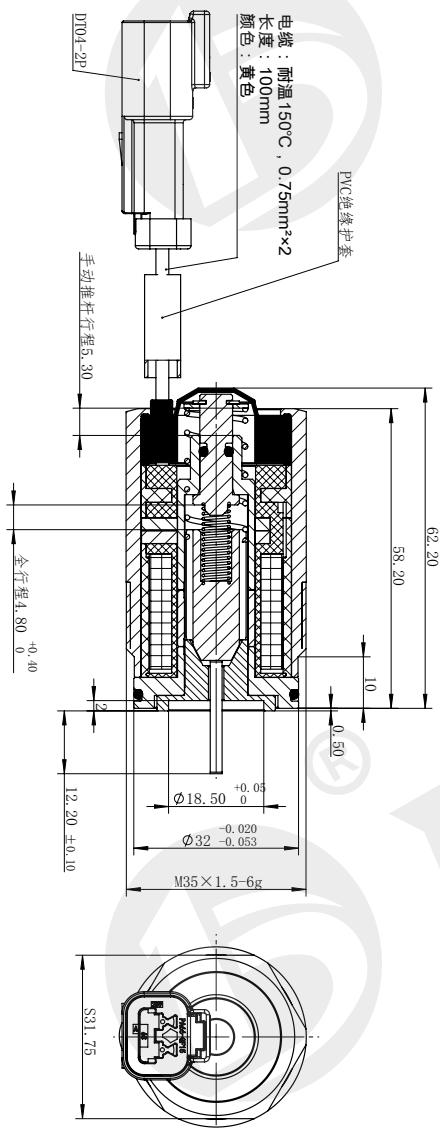

样本数据来源于试验室环境，仅供参考，贵公司如需最新数据或有特殊需求，欢迎联系博业液压工程师。  
The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.

**DC 12V**  
**DC 24V**

其它规格可定做  
Other can be customized

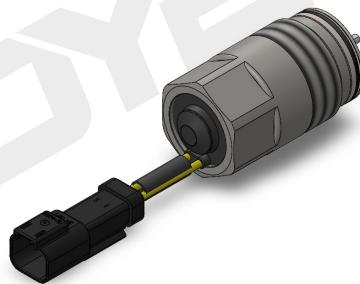

技术参数 /technical parameter			
环境温度 Ambient temperature	°C	-25~50	
电压波动范围 Voltage fluctuation range	%	85~110	
额定功率 Rated power	W	18	
额定行程 Rated stroke	mm	—	—
全行程 Full stroke	mm	≥ 5	
工作油压 Working oil pressure	Mpa	≤ 21	
防护等级 Degree of protection		IP67	
操作频率 Operating frequency	T/h	12000	
通电持续率 Power on duration	%	100	
绝缘等级 Insulation class		H(180)	
电气连接方式 Electrical connection mode		双引线 +DT04-2P	

### 力 - 位移特性曲线

## F-S characteristic curve

